



PRC016 (SINGLE-PHASE) RADIAL DRILL PRESS • 16 MM



- Table, base and drilling head in cast iron, and motor body in aluminum.
- Spindle mounted on ball bearings.
- Rack & pinion table raising and lowering system.
- Rack & pinion drilling head travelling system till 420 mm.
- Wet table rotating at 360 ° and tilting up to 45 °.
- Strong base with T-groove and drilled to be fixed on the floor.
- Adjustable depth stop for accurate and repetitive drilling operations.
- Keyless chuck B16.



Tilting radial head



Aluminium pulleys

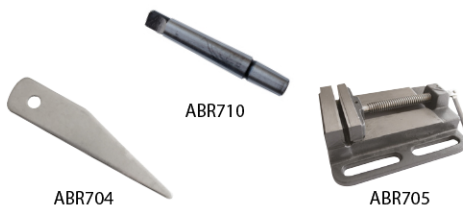





Adjustable chuck guard

| | |
|-----------------------------|---------------------------|
| WARRANTY | 2 |
| Motor power (230 V - 50 Hz) | 550 W - S1 |
| Volt power supply | 230 V / 50 Hz |
| Drilling capacity | 16 mm |
| Spindle taper | CM2 |
| Column diameter | 70 mm |
| Spindle stroke | 80 mm |
| Number of speeds | 5 |
| Speed range | 500 - 2450 rpm |
| Throat depth | 420 mm |
| Head tilt | 90° left/ 45° right |
| Head swivel | 360° |
| Table/spindle distance | 770 mm |
| Base/spindle distance | 1280 mm |
| Collar diameter | 40 mm |
| Table dimensions | ø 310 mm |
| Base dimensions | 420 x 250 mm |
| Dimensions | 850 x 310 x 1620 mm |
| Net weight | 61 kg |
| Spare parts reference | 016 (+ N°/ exploded view) |
| Gencod | 3661589046567 |
| Packing | 1420 x 500 x 260 |
| Gross weight | 64 kg |

ACCESSORIES AND OPTIONS

- The machine comes with an arbor CM2/B16, 1 keyless chuck B16, 1 drift key, 1 fixing screws kit, spanners and instructions manual.



| | REF |
|--------------------------------------------------------------------------------------------|-----------|
| Arbor CM2/B16 | ABR710 |
| Drift key | ABR704 |
| Vice with 100 mm jaws | ABR705 |
|  100 mm | INTERAXIS |
|  20 mm | |
|  110 mm | |
| | 135 mm |

CONSUMABLES

PAGES
197 TO 201